

Zerve BOARD



Elephant Gypsum Board Access Panel


Zerve BOARD

The Siam Gypsum Industry (Saraburi) Co.,Ltd.

A member of Lafarge Boral Gypsum in Asia



Easy & Elegant Access Door for Ceiling

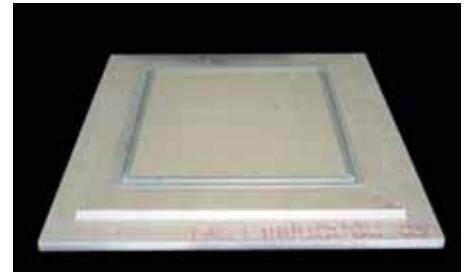

Frame

Traditional way of Access Panel

Innovative ZerveBOARD Access Panel

ZerveBOARD is a readymade high quality access panel manufactured from special Gypsum Board under high control. All edges around the hole and around the pane are reinforced with aluminum profiles to increase strength and prevent damage during usage. ZerveBOARD can be easily installed with 9 mm. drywall ceiling. 3 standard sizes are available with either Standard or MoistBloc.







Type and size of ZerveBOARD (all are applicable to 9 mm. drywall ceiling)

Type	Pane Size (Width x Length)	Frame Size (Width x Length)
ZerveBOARD Standard	300x300 mm.	500x500 mm.
	450x450 mm.	650x650 mm.
	600x600 mm.	800x800 mm.
ZerveBOARD MoistBloc	300x300 mm.	500x500 mm.
	450x450 mm.	650x650 mm.
	600x600 mm.	800x800 mm.

Characteristic

- Easy and quick to install
- Looks neat and harmonious with the ceiling, no visible frame and seamless joint.
- Easy to open and close.
- Strong and durable, less damage when use compare to traditional type.


*Tailor made sizes and shapes are available for projects

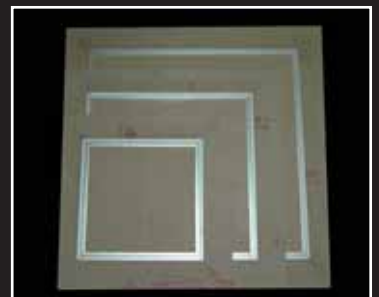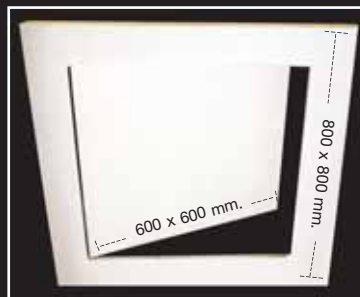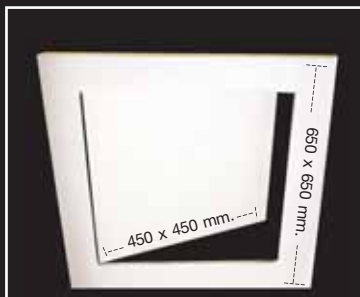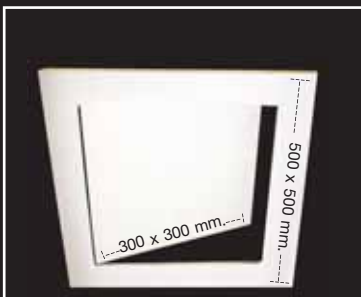



Installation

1. After determine and mark the right position, install (or add) ProLine Drywall Ceiling Metal Profiles in square shape with same dimension (center-to-center) as the selected ZerveBOARD frame size. Add 4 adjustable hangers at each corner.
2. Fix the ZerveBOARD frame to the ProLine Drywall Ceiling Metal Profiles by drywall with screws at least every 100 mm. along the frame.
3. Install Elephant Gypsum Board around the frame and seal the joints with jointing tape and coat the joint with EasyPlas compound.
4. After finishing of the joints, lay the ZerveBOARD together on the frame.
5. Apply painting or other surface finishing together with the ceiling.

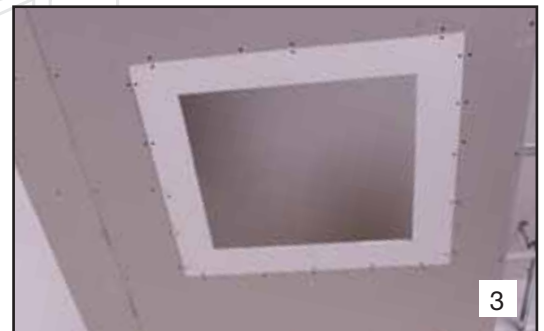


Usage Area

ZerveBOARD is suitable for most of interior space.




SPECIFICATION

Use ZerveBOARD manufactured from Standard Gypsum board under TIS 219-2524 or use MoistBloc (for moisture resistant) applicable with 9 mm. concealed ceiling without visible joints and frame. Opening size = 600 x 600 mm. (or 450 x 450 mm., or 300 x 300 mm.). Install with Elephant ProLine Drywall Ceiling Metal Profiles, produced from 0.52 mm. thickness, high quality hot-dip galvanized steel, under TIS 863-2532 and TIS 50-2538, with propriety accessories recommended
by Siam Gypsum.





Installation

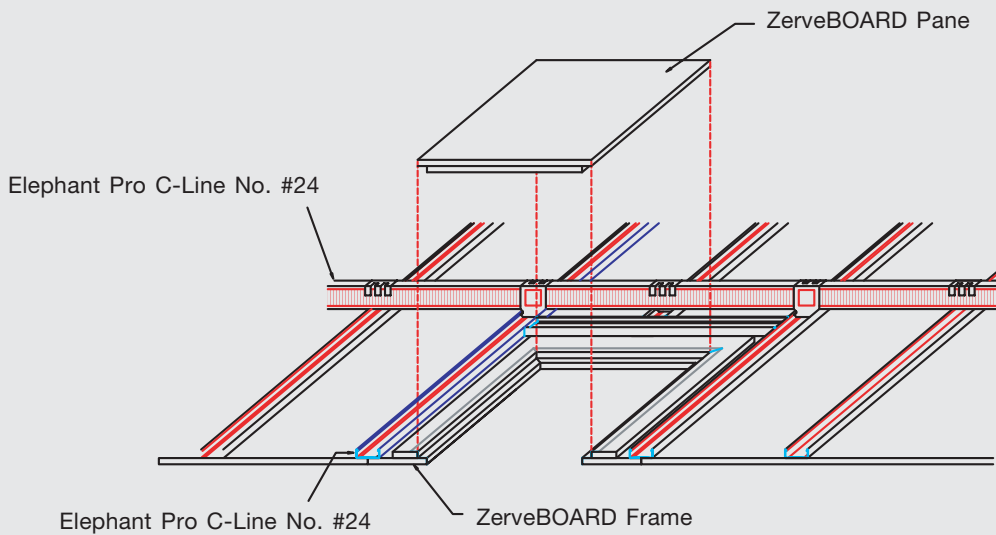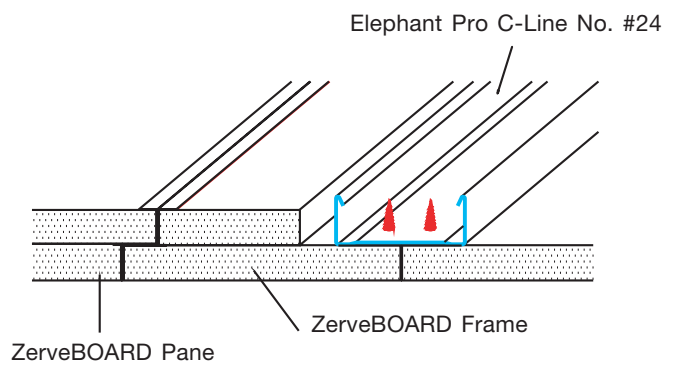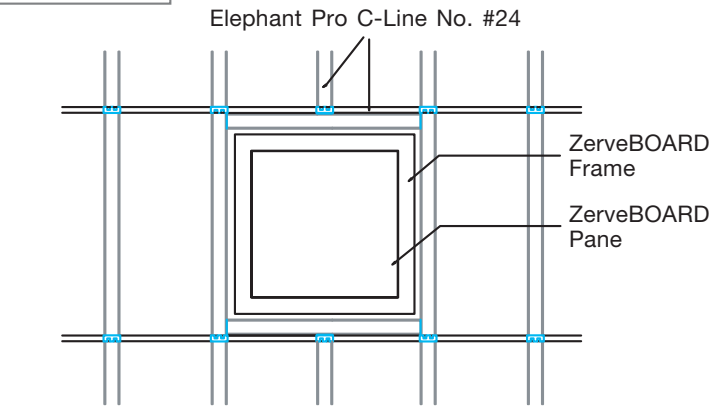

Siam Gypsum Policy

- We commit to develop an offer adapted to key market segments answering customer's expectations.
- We commit to constantly produce and deliver in full the products, solutions and services expected by our customers.
- We commit to communicate regularly our customers our quality performance.

P016
11/50



Certified ISO 9001 and ISO 14001

The Siam Gypsum Industry (Saraburi) Co.,Ltd.
 A member of Lafarge Boral Gypsum in Asia
 1 Siam Cement Road, Bangsue, Bangkok 10800 Thailand
 Tel : +66 2 555 0022 Fax : +66 2 555 0003
www.siamgypsum.com



Available at Gypsum Express, Cementhai Home Mart, HOME MART, Cementhai dealers and Siam Gypsum dealers