


# **USG RADAR™ OPEN PLAN ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE

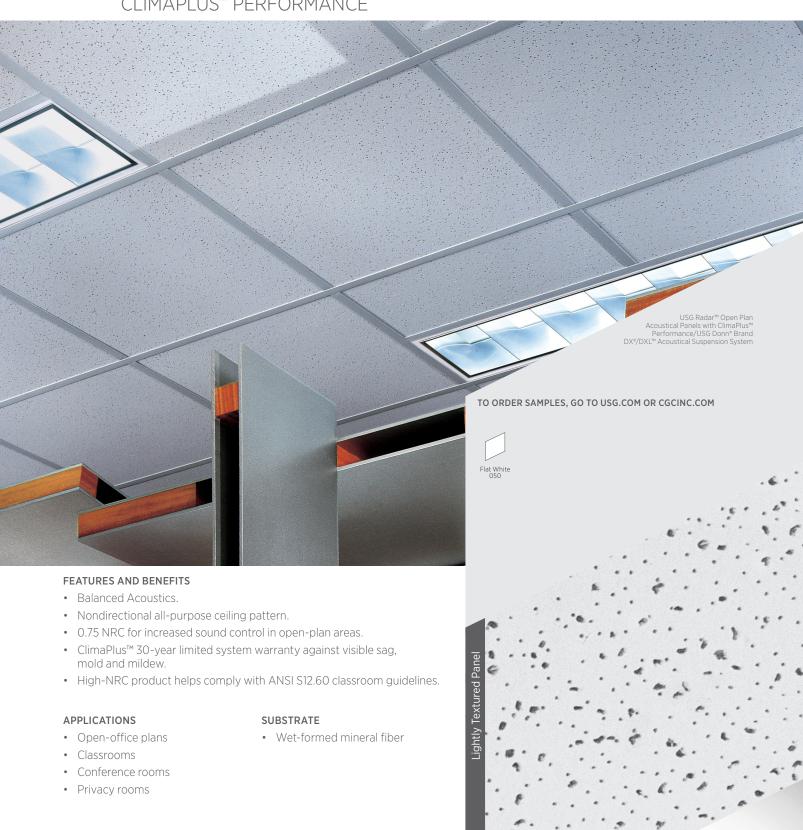

## **USG RADAR™ OPEN PLAN ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE





## ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

800 USG.4YOU (874-4968)

TECHNICAL SERVICES

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

## USG RADAR™ OPEN

**PLAN PANELS** 

PRODUCT CERTIFIED FOR LOW CHEMICAL

				(I) UL Classified								
Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color⁴	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
				NRC	CAC	Ø		ø	S	Ø	HRC	\$
SQ	2'x2'x7/8"	Class A	22320	0.75	35	0.84	White	A,B,C	Low		43%	\$\$
	2'x4'x7/8"	Class A	22325	0.75	35	0.84	White	A,C	Low		43%	\$\$
SLT	2'x2'x7/8"	Class A	22340	0.75	35	0.84	White	D	Low		43%	\$\$
	2'x4'x7/8"	Class A	22345	0.75	35	0.84	White	D	Low		43%	\$\$
FLB	2'x2'x7/8"	Class A	22330	0.75	35	0.84	White	E,F,G,H	Low		43%	\$\$
	2'x4'x7/8"	Class A	22335	0.75	35	0.84	White	E,F,G,H	Low		43%	\$\$

## Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on  $usg.com\ and\ at\ product guide.ulen vironment.com.$ 

**USG DXW™** 

### ClimaPlus™ Warranty Performance3

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sagresistance performance.

USG Fineline®

1/8 DXFF™

USG Identitee\*

DXI™

## **GRID PROFILE OPTIONS**

### PHYSICAL DATA/ **FOOTNOTES**

### Product literature

A USG

DX®/DXL™

Data sheet: SC2565

### ASTM F1264 classification Type III, Form 2, Pattern C, E

ASTM E84 and CAN/ULC S102 surface-burning characteristics

USG Centricitee™

DXT™

Flame spread: 25 or less Smoke developed: 50 or less

Weight 0.97 lb./sq. ft.

usgdesignstudio.com or cgcdesignstudio.com

### Thermal resistance

USG

DX\*/DXL™

R-1.8 (7/8" panels)

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

### Maintenance

Panels can be cleaned easily with a soft brush or vacuum.

### Metric sizes available

Contact sales for minimum quantities and lead times.

### Notes

USG Centricitee

DXT™

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com
- 2. LR values are shown as averages.

USG Fineline®

DXF"

- 3. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. No Flat Black or "Deeptones" are available on any reveal edge USG Radar™ panel
- 5. Maximum 2'x2' with SQ edge panels.

### Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

### SC2565/rev. 11-16